

Patriot pH Neutralizing Filter

The Patriot pH Neutralizing filter is designed to neutralize acidic water conditions and is custom engineered based on the results of a comprehensive water analysis

Operation of The Filter

These filters are custom engineered and built to order based on the results of a comprehensive water analysis. Patriot pH Neutralizing filters are used where low pH water is a problem. Naturally occurring acidic water and potable drinking water, such as that produced by Reverse Osmosis, can be effectively neutralized by using special neutralizing media. The media will require periodic replacement as it is consumed in the neutralization process. Calcium and magnesium carbonates are introduced into the ionic makeup of the water during neutralization which may necessitate the installation of a water softener to reduce the hardness of the water.

Filtration Media

A mixture of Calcite and Corosex allows for correction of water with a pH as low as 5.8. The two media are combined together to provide a uniform neutralization rate. A food-grade gravel underbedding ensures low pressure drops and uniform flow rates. If pH is less than 5.7, then chemical injection will be required in addition to this filter. The system is back washed periodically to prevent agglomeration.

Controller/Meter

Regeneration of the system is initiated by a simplified electronic control timer, which electronically meters filtered water flow to the home and makes decisions to clean based on water consumption and program settings.

Regeneration

These filter models are controlled electronically. A fully programmable microprocessor controls backwash, rapid rinse and return to service cycles.

Control Valve

A hydraulically balanced, piston slides effortlessly through seals & spacers. All parts in the waterway are either Teflon coated brass or composite noryl® materials for a long and reliable service life.


Resin Tanks

All filter models feature a non-corrosive fiberglass tank, with a one piece thermoplastic inner liner. The tank has a maximum working pressure of 90 psi and a working temperature up to 120°F. The tank is approved by NSF, UL, FDA, and meets WQA Standard S-100. All fiberglass tanks carry a limited lifetime warranty.

These filters should only be purchased after a water analysis has been completed. The following contaminants should be tested:- Iron, Manganese, Hydrogen Sulfide, TDS, pH, Hardness and Turbidity.

1-800-454-3429

Residential pH Neutralizing Filter

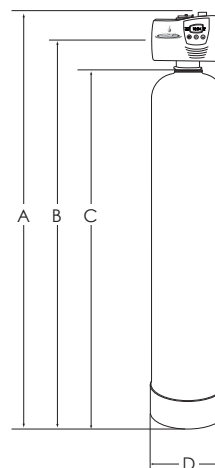

Patriot pH Neutralizing Filter

	1ft3	2ft3	3ft3
maximum system capacity	N/A	N/A	N/A
economy system capacity	N/A	N/A	N/A
salt used per regen (maximum)	N/A	N/A	N/A
salt used per regen (economy)	N/A	N/A	N/A
peak flow rate	27	30	31
water pressure range	45 - 75	45 - 75	45 - 75
water temperature range	35 - 100	35 - 100	35 - 100
ambient temperature range	35 - 150	35 - 150	35 - 150
maximum piping diameter	1.25"	1.25"	1.25"
electrical rating V-Hz	24/60	24/60	24/60
dimension A - overall system height	56"	63.25"	75.5"
dimension B - system piping height	51"	58.5"	70.5"
dimension C - height of mineral tank	48"	55".5"	67"
dimension D - system tank diameter	10.5"	13.5"	14.5"

These filters should only be purchased after a water analysis has been completed. The following contaminants should be tested:- Iron, Manganese, Hydrogen Sulfide, TDS, pH, Hardness and Turbidity.

Residential Limited Lifetime Warranty

1st year of ownership

This residential water system is warranted as to workmanship and material for a period of one year from date of original installation at the original installation site, if properly installed by an Intermountain Water Certified Installer. Should any component in your system prove defective in the first year, it will be repaired, rebuilt or replaced at our option, provided it is returned directly to us.

After the 1st year of ownership, should any component in your system prove defective, it will be repaired, rebuilt or replaced at our option for a maximum charge of \$50.00, provided it is returned directly to us. Labor, transportation, shipping or other charges incurred in the diagnosis, replacement or repair of defective components are not covered by this warranty. If you choose not to send a defective component back to us, repairs to your system can be conducted in your home by a factory authorized service technician if your home is within the operating radius of an Intermountain authorized repair center. This warranty does not cover transportation, shipping, diagnosis, replacement and repair charges resulting from your in-home repair request. Intermountain Water or its subsidiaries will not be held responsible for loss or damage caused by any defective component. Intermountain Water disclaims the implied warranty of fitness for a particular application.

This warranty must be presented at time of claim and all claims must be presented within 30 days of occurrence.

This warranty is void if your water system is not installed in compliance with prevailing plumbing codes, according to Intermountain Water's installation protocol, or if the influent water temperature is hotter than 90F or where the static water pressure is less than 25psi, or more than 90psi. Intentional/malicious damage, misuse, neglect, unauthorized modifications or accidental damage to the system are not covered by this warranty. This warranty does not cover damage caused by pressure surges, water hammer, power surges or sags, lightning, fire, flood, freezing, earthquake, acts of God or other casualty.

Your water system is subject to normal wear and tear during its usable service life. Wear and tear is not regarded as a product defect and is not covered by this warranty.

Your water system includes a Pur-gard/Pur-Gard Plus performance-enhancing injection system. The Pur-gard/Pur-Gard Plus performance-enhancing additive is essential to proper functioning of your system. If Pur-gard is not added to the injection system at the prescribed interval in your owner's manual, this warranty will be void.

This limited lifetime warranty is only valid if registered within 10 days of initial installation. If unregistered, this warranty is only valid for 1 year from the date of original manufacture.